
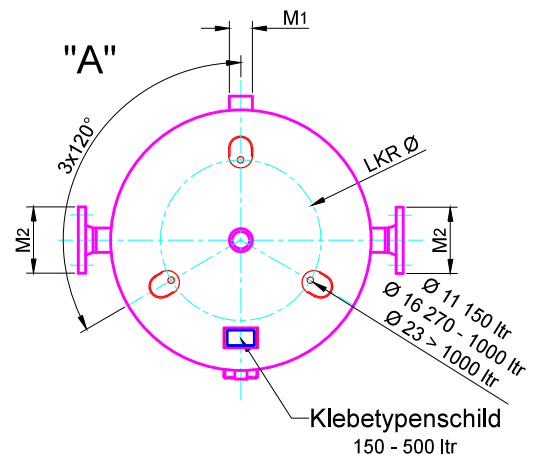


# DRUCKBEHÄLTER S

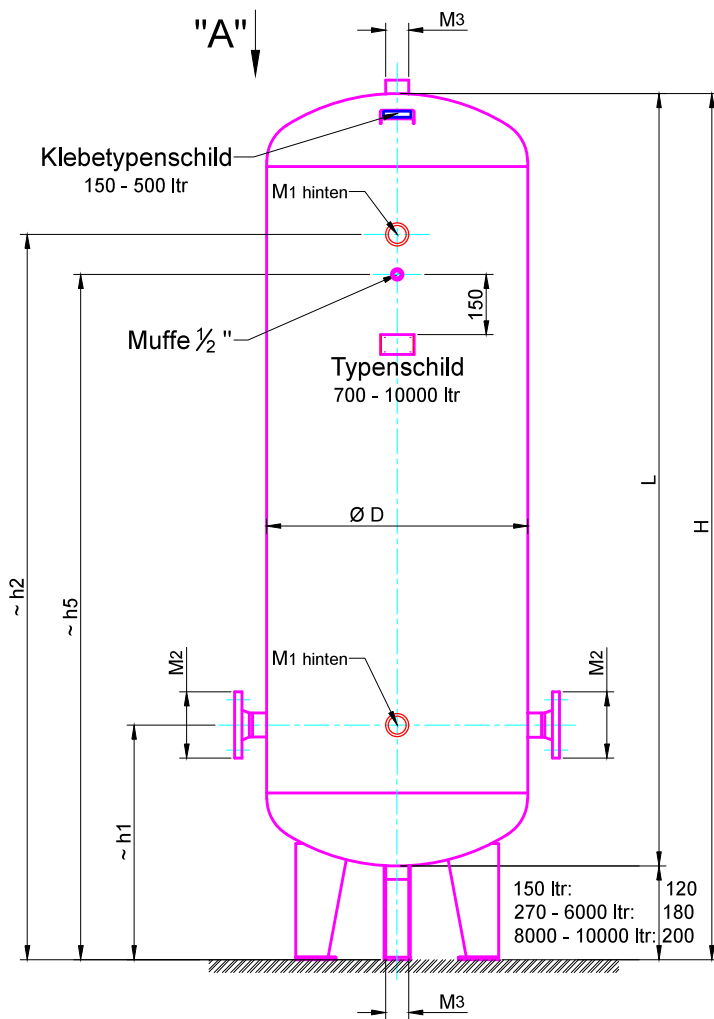

Hauptmaße				Anschlussmaße						Füße
Vol.	Ø D	H	L	~h1	~h2	~h5	M1	M2	M3	Lkr Ø
ltr	mm			mm			Muffe .." / Flansche DN ..			mm
150	450	1050	930	340	830	830	1"	-	1"	360
270	500	1570	1390	405	1345	1345	1"	-	1"	320
500	600	1930	1750	425	1685	1685	2"	-	1½"	440
700	700	2070	1890	505	1745	1745	2"	-	2"	480
900	800	2040	1860	480	1740	1740	2"	-	2"	580
1000	800	2190	2010	480	1890	1580	2"	-	2"	580
1500	1000	2180	2000	535	1825	1505	2"	-	2"	800
2000	1100	2360	2180	535	2005	1605	2"	-	2"	900
3000	1250	2780	2600	755	-	1710	-	DN65	1½"	1030
3000 1)	1300	2570	2390	700	-	1670	-	DN65	1½"	1050
4000	1250	3780	3600	755	-	1710	-	DN65	1½"	1030
4000 1)	1300	3495	3315	700	-	1670	-	DN65	1½"	1050
5000	1400	3760	3580	800	-	1700	-	DN80	2"	1200
6000	1400	4260	4080	800	-	1700	-	DN80	2"	1200
8000	1600	4370	4170	900	-	1700	-	DN100	2"	1400
10000	1600	5370	5170	900	-	1700	-	DN100	2"	1400

1) Sonderausführung

Muffen: Gewinde ISO 228 ; V-Flansche: EN 1092-1 / DIN 2633 ; Auf Anfrage: Muffen / V-Flansche in M1, M2, M3  
 Oberflächen: roh, grundiert, lackiert oder verzinkt ISO1461 Abmaßtoleranzen: ISO 13920-C



Technische Änderungen ohne vorherige Ankündigung vorbehalten !

Unser Urheberrecht gemäß ISO 16016 beachten.

Stand  
12 / 2015